

SONTH


武汉尚斯机电有限公司

Sonth (HK) Industrial Co.,Ltd

SG25-370: dc spur gear motor

Description

- 1.Diameter: 25mm
- 2.Voltage: 12V (6~24V)
- 3.Input speed: 6000rpm (6000~18000rpm)
- 4.Reduction ratio: 1/4.4,1/20,1/78,1/1000,1/363....
- 5.Output speed: 5~500rpm
- 6.Rated torque: 0.2~4Kg.cm
- 7.Can match encoder
- 8.Specs can be customized for you

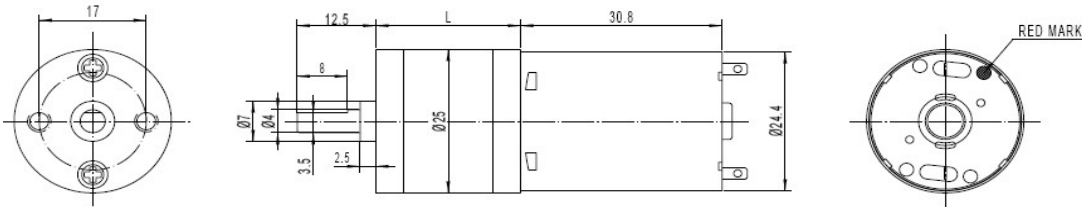

Reduction Ratio	Gearbox Length L= mm	Voltage 12V, Input 6000rpm (6V,9V,12V,24V)					Stall	
		No load Speed/rpm	At load Speed/rpm	Current/A	Torque/Kg.cm	Power/W	Current/A	Torque/Kg.cm
1/4.4	15	1360	1090	0.15	0.3	1.0	0.5	2.0
1/10	17	600	480	0.15	0.5	1.0	0.5	2.0
1/20	19	300	240	0.15	1.0	1.0	0.5	3.0
1/34	21	190	150	0.15	1.5	1.0	0.5	5.0
1/51	21	120	90	0.15	1.5	1.0	0.5	5.0
1/78	23	75	60	0.15	2.0	1.0	0.5	5.0
1/100	23	60	48	0.15	2.0	1.0	0.5	5.0
1/165	25	36	28	0.15	2.5	1.0	0.510	7.0
1/218	25	28	22	0.15	3.0	1.0	0.5	7.0
1/363	27	16	13	0.15	3.8	1.0	0.5	10
1/478	27	12.5	10	0.15	4.0	1.0	0.5	10
1/500	27	12	8	0.15	4.0	1.0	0.5	10

Tel: +86-27-87153161

Fax: +86-27-51893787

Address: 26th Floor,Block A,LongAn GangHui City,
MinZu Road,Optical Vally,WuHan,HuBei,China

Email: cassy@sonth-industrial.com

Web: www.sonth-industrial.com ; www.sonth123.com