

SONTH

武汉尚斯机电有限公司


Sonth (HK) Industrial Co.,Ltd

SG65-528: dc spur gear motor



Description

- 1.Diameter: 65mm
- 2.Voltage: 24V (6~24V)
- 3.Input speed: 6000rpm (3000~18000rpm)
- 4.Reduction ratio: 1/36,1/60,1/90,1/100,1/225....
- 5.Output speed: 5~500rpm
- 6.Rated torque: 2~15Kg.cm
- 7.Can match encoder
- 8.Specs can be customized for you

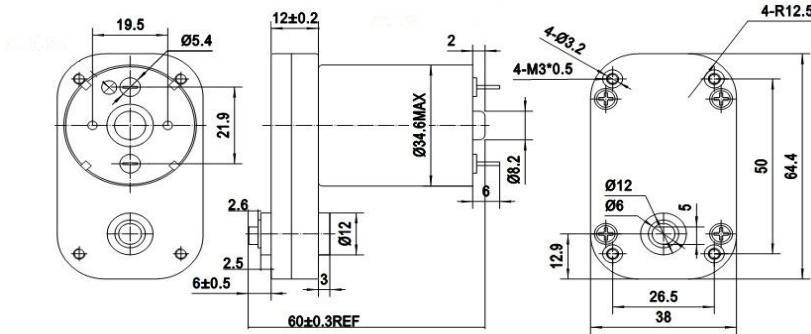

Reduction Ratio	Gearbox Length L= mm	No load Speed/rpm	Voltage 24V, Input 6000rpm (6V,12V,24V)				Stall	
			At load Speed/rpm	Current/A	Torque/Kg.cm	Power/W	Current/A	Torque/Kg.cm
1/36	12	166	130	0.3	2.0	2	2	8
1/48	12	125	100	0.3	2.0	2	2	8
1/60	12	100	80	0.3	2.0	2	2	8
1/66	12	90	70	0.3	2.0	2	2	8
1/90	12	65	50	0.3	10	2	2	25
1/100	12	60	48	0.3	10	2	2	25
1/120	12	50	40	0.3	10	2	2	25
1/155	12	38	30	0.3	10	2	2	25
1/173	12	34	27	0.3	10	2	2	25
1/225	12	26	20	0.3	10	2	2	25
1/450	12	13	10	0.3	15	2	2	35

Tel: +86-27-87153161

Fax: +86-27-51893787

Address: 26th Floor,Block A,LongAn GangHui City,
MinZu Road,Optical Vally,WuHan,HuBei,China

Email: cassy@sonth-industrial.com

Web: www.sonth-industrial.com; www.sonth123.com