


SGP28-28BL: dc brushless planetary gear motor



Description

1. Diameter: 28mm
2. Voltage: 24V
3. Input speed: 4000rpm
4. Reduction ratio: 1/4, 1/19, 1/62, 1/231, 1/1014...
5. Output speed: 4.5~730rpm
6. Rated torque: 0.2~20Kg.cm
7. Built-out drive (8 wires), built-in drive (5 wires)
8. Specs can be customized for you

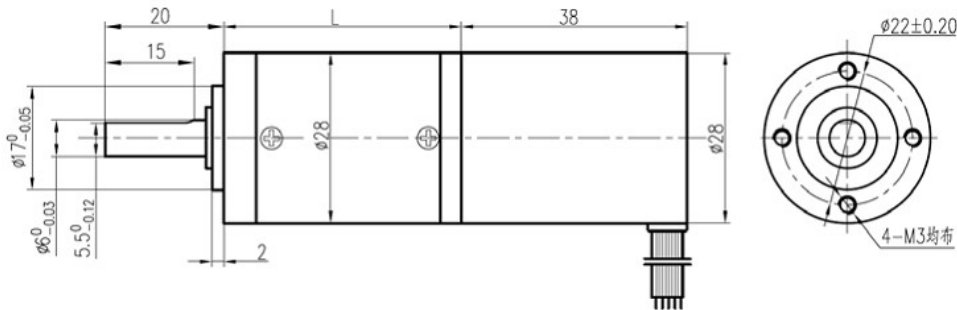

Reduction Ratio	Gearbox Length L= mm	No load Speed/rpm	Voltage 24V, Input 4000rpm				Stall	
			At load Speed/rpm	Current/A	Torque/Kg.cm	Power/W	Current/A	Torque/Kg.cm
1/3.7	31	1078	730	0.3	0.2	2	2.5	6
1/5.2	31	772	520	0.3	0.3	2	2.5	6
1/14	40	286	195	0.3	0.8	2	2.5	25
1/19	40	211	140	0.3	1.0	2	2.5	25
1/27	40	148	100	0.3	1.5	2	2.5	25
1/51	49	78	55	0.3	2.5	2	2.5	50
1/71	49	56	40	0.3	3.5	2	2.5	50
1/100	49	40	27	0.3	5.0	2	2.5	50
1/139	49	29	20	0.3	7.0	2	2.5	50
1/189	58	21	15	0.3	8.6	2	2.5	60
1/264	58	15	10	0.3	12	2	2.5	60
1/369	58	11	7.5	0.3	18	2	2.5	60
1/516	58	8	5.5	0.3	20	2	2.5	60
1/720	58	5.5	4.5	0.3	20	2	2.5	60

TEL: +86-755-89480927
 FAX: +86-755-88366423
 Web: www.sonth123.com
 Msn: sonth123@hotmail.com